



9.0 POLLUTANT LOADINGS FOR MUNICIPAL STORM OUTFALLS AND REMOVAL BY ASSOCIATED BMPs

Annual stormwater loadings from municipal outfalls in Frederick County were calculated using the Simple Method (Schueler 1987) for each pollutant of interest. The Simple Method computes stormwater pollutant loading as a function of annual rainfall (P), percent imperviousness (I), area (A), pollutant concentration (C), and conversion factors. In addition, it employs a correction factor (P_j) to account for the fraction of storms that produce runoff. Values for the equation variables were taken from published literature and laboratory data. Analytical results from Part 2 outfall sampling, completed in 1999¹, were incorporated into the Simple Method formula to estimate pollutant loads for each of the identified municipal storm outfalls. Results of pollutant loading calculations for each outfall have been submitted on the accompanying CD. Calculation factors for outfall pollutant loading estimates and reductions by associated structural BMPs were derived in the following manner:

- The annual rainfall volume (P) for Frederick County was determined as the average of historic yearly rainfall data (1961-1990) taken from the NOAA annual summary for the Emmitsburg 2 SE site.
- The value for the correction factor, P_j , was taken from Schueler (1987). For all calculations, P_j was assumed to be 0.9.

Schueler (1987; Section 1.2.2) provides a range of values for percent imperviousness for each specific land use (Table 9-1). The median number from each range was calculated and used in the Simple Method calculation. For mixed land uses, the ranges for the individual land uses were combined, and the median value was used. 'PARK' was set to the same as 'OTHER'.

BMP pollutant removal efficiency values were taken from Schueler (1987), Schueler (1997a), Schueler (1997b), Winer (2000), and Simpson and Weammert (2009; Table 9-2). In cases of combined BMP use, the maximum removal efficiency was used except if one of the values was negative, then the values were added together. Note that in a few cases, removal efficiencies are negative values, indicating that these BMPs result in a release of some constituents. Winer (2000) explains that in the case of dissolved phosphorus, organic or sediment bound forms of the nutrient are transformed within certain structural BMPs and flushed out during subsequent storm events. Presumably similar processes occur for TSS, TP, and Cu within oil/grit separators as indicated in the table.

¹ NPDES MS4 Permit Number: MD0068357, Annual Report Number 3. November 15, 1999. See Section 4.1.

Concentration values are given as flow-weighted EMCs calculated from Part 2 stormwater sampling in Frederick County. Grab samples were collected from three storms at five different sites. From the flow values measured at each grab sample time, the total storm volume was calculated. A volume-weighted average was used to determine the mean concentration for each pollutant from all 15 storm events. The EMC of each pollutant for a particular storm (Table 9-3) was multiplied by the total volume of water for that storm to find the total mass of pollutant. The flow-weighted EMC for a given pollutant was determined to be the total mass of pollutant for the 15 storms, divided by total storm volume. See Table 9-2 for the concentrations used.

Area values were supplied by the County’s SWM facility database (current as of December 31, 2009), which provides both a total drainage area and a managed drainage area for each site. Between 2008 and 2009, total evaluated drainage area decreased from 13,559 to 13,391 acres and total managed drainage area increased from 10,591 to 10,935 acres. In 2009, 78.5% of the total evaluated drainage area was managed, and that value increased slightly from 78.1% in 2008. To calculate annual loading in the absence of any BMPs, the total drainage area value was used; these are summarized by BMP type in Appendix D (Table D-1). The managed annual loading was found from the sum of the following two individual loading values. The first was calculated using the area managed by the BMPs, multiplied by the removal efficiency. The second loading value was calculated with an area equal to total area minus the managed area. These values were then summed to provide a loading estimate with the BMPs in place; a summary listing of these results is provided by BMP type in Appendix D (Table D-2). The difference between loadings with and without BMPs provides an estimate of pollutant removals by these BMPs (Appendix D, Table D-3); a percentage removal by BMP type, and pollutant, is presented in Appendix D (Table D-4) and Figure 9-1. Similar estimates can be made on a per-acre basis (Appendix D, Tables D-5 and D-6).

Extended Dry Detention Ponds, Infiltration Trenches, Dry Ponds, and Extended Wet Detention Ponds make up 65.6% of the structural BMPs in Frederick County (31.9%, 14.8%, 9.7%, and 9.1%, respectively) (Figure 9-2). Results show that on a total removal basis, Extended Wet and Dry Detention Ponds remove the most pollutants because of their dominance in total drainage area covered (44.1%; Figure 9-3). Extended Wet Detention Ponds are most efficient, removing an average 24.7% of all pollutants considered. Extended Wet Detention Ponds removed the most copper, lead, dissolved phosphorus, total phosphorus, and zinc (Figure 9-1, Appendix D-3).

Land Use Category	% Imperviousness
Commercial (COM)	70
Residential (RES)	30
Institutional (INS)	50
Mixture (MIX)	70
Agricultural (AG)	0
Industrial (IND)	70
Other (OTH)	15
Park Lands (PARK)	15

Table 9-2. Percent removal of pollutants by stormwater management structure type (2010)

	TSS	TP	TN	COD	BOD	Cd	Cu	Pb	Zn	TKN	TDS	Diss. Phos.
Dry Pond (DP)	52	45	27	-1	-1	54	10	43	5	ND	ND	0
Dry Well (DW), Underground Structure (UGS), and Underground Device (UNG)	0	0	0	0	0	0	0	0	0	0	0	0
Extended Dry Detention Pond (EDSD) and Extended Detention Device (EDD)	60	20	20	25	25	54	26	43	26	ND	ND	-11
Extended Wet Detention Pond (EDSW)	60	45	20	27	27	24	44	73	69	ND	ND	67
Infiltration Basin (IB) ^(a)	95	85	80	80	80	75	75	75	75	ND	ND	ND
Infiltration Trench (IT) and Complete Exfiltration (ITCE)	95	85	80	66	66	ND	34	71	80	ND	ND	100
Oil/Grit Separator (OGS) ^(b)	-8	-41	15	ND	ND	ND	-11	10	17	21	ND	40
Sand Filter (SF) and Water Quality Exfiltration (ITWQE)	80	60	40	67	67	ND	49	ND	88	ND	ND	3
Shallow Marsh (SM)	60	45	20	21	21	69	33	63	42	ND	ND	29
Swale (SW), Bioretention (BIO), and Vegetative Filter (VEG)	80	75	70	67	67	42	51	67	71	ND	ND	38
Wet Pond (WP) and Retention (RTN)	60	45	20	45	45	24	58	73	65	ND	ND	62

Numbers in Red from: Simpson, T. and S. Weammert. 2009. Developing Nitrogen, Phosphorus and Sediment Reduction Efficiencies for Tributary Strategy Practices. BMP Assessment: Final Report. University of Maryland/Mid-Atlantic Water Program. Available at: http://archive.chesapeakebay.net/pubs/bmp/BMP_ASSESSMENT_FINAL_REPORT.pdf

Numbers in Bold information from:

Winer, R. 2000. National Pollutant Removal Performance Database for Stormwater Treatment Practices, 2nd Edition. Prepared by Center for Watershed Protection for U.S. EPA Office of Science and Technology.

Other (non-bold) information from:

Schueler, T. R. Technical Note 95. Comparative Pollutant Removal Capability of Urban BMPs: A Reanalysis. Watershed Protection Techniques. Vol. 2, No. 4. June 1997 except as noted below:

^(a) (numbers not in red on this line) Schueler, T. R. Controlling Urban Runoff: A Practical Manual for Planning and Designing Urban BMPs. Department of Environmental Programs Metropolitan Washington Council of Governments. July, 1987 Washington Metropolitan Water Resources Planning Board.

^(b) Schueler, T.R. Technical Note 101. Performance of Oil-Grit Separators in Removing Pollutants at Small Sites. Watershed Protection Techniques. Vol. 2, No. 4 June 1997.

ND = No data available.

Table 9-3. Event mean concentrations (EMC) for each parameter used for estimating pollutant loads (Schueler 1987)

Parameter	Concentration (mg/l)
TSS	15.21
TP	0.13
TN	1.80
COD	13.65
BOD5	4.34
Cd	0.0004
Cu	0.0095
Pb	0.0046
Zn	0.0644
TKN	1.03
TDS	94.40
Diss. Phos	0.09

$$\text{Load} = [(P)(P_j)(R_v)/12]*(C)(A)(2.72)$$

P = annual precipitation (inches) = 43.8 C = concentration in mg/l

P_j = fraction of events that produce runoff = 0.9

R_v = 0.05+0.009(I) 2.72 = conversion to pounds

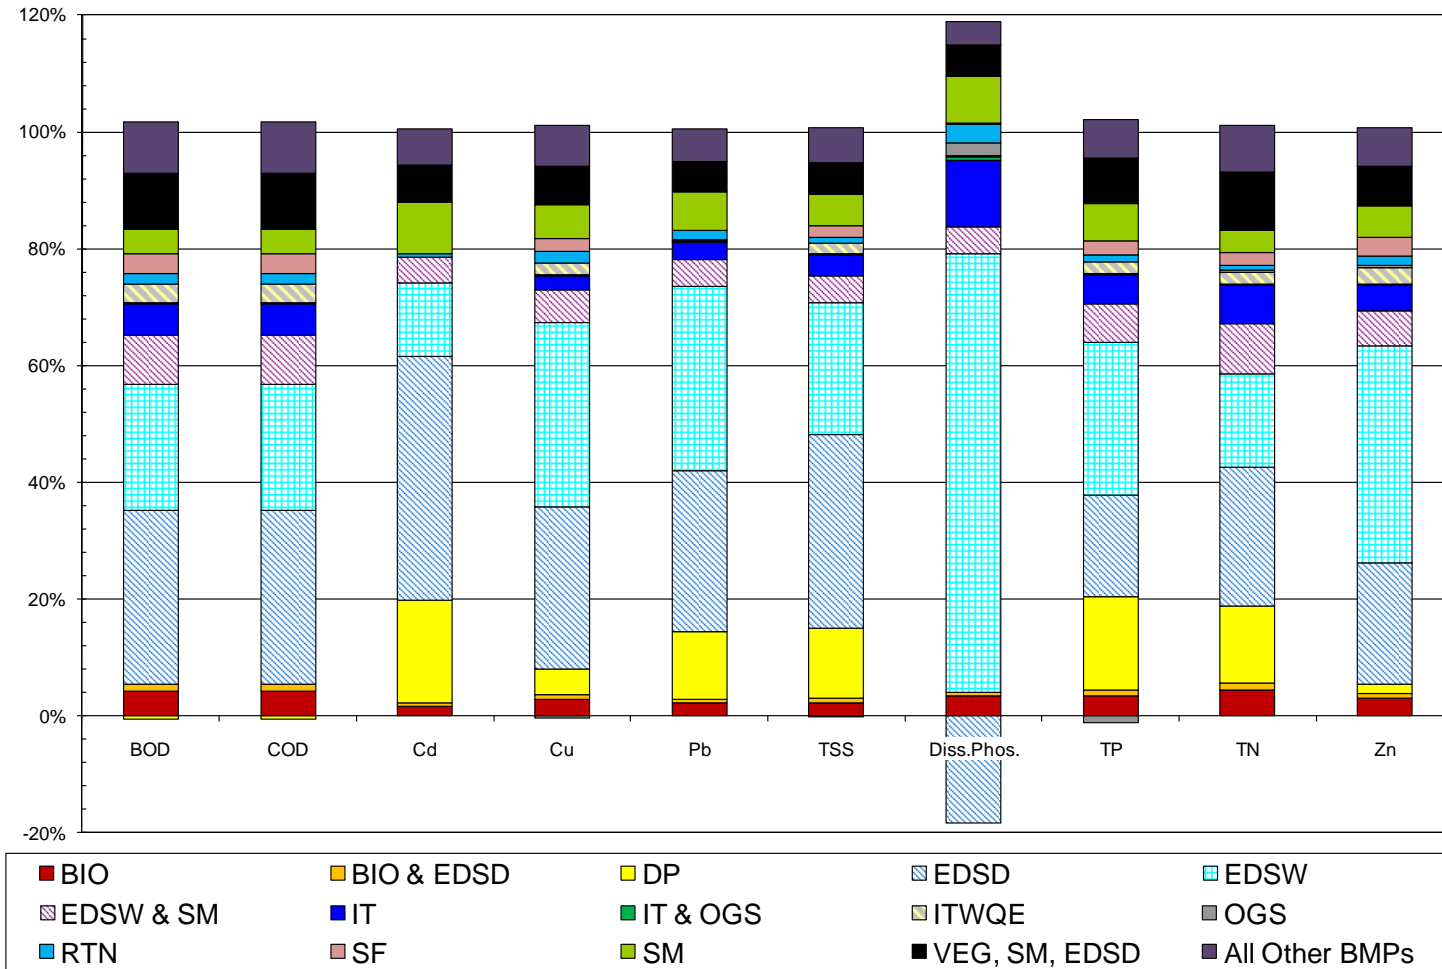


Figure 9-1. Percent pollutant removal by BMP type for Frederick County outfalls based on the Simple Method. BMP types that were combined in the 'All Other BMPs' category on the graph are: BIO & EDSD, DP & IT, EDD, EDD & OTH, EDSD & OGS, EDSD & SM, EDSD & VEG, EDSD & UGS, IB, IB & DP, IT, OGS, UGS, ITCE, ITCE & VEG, OGS & UNG, OGS, UGS, VEG, OGS & UGS, SF & EDSD, SF & SW, SF & UGS, SM & DP, SW, UNG, UNG & IT, VEG, WP. These comprise of less than 10% of the cumulative percentage removal across all pollutants.

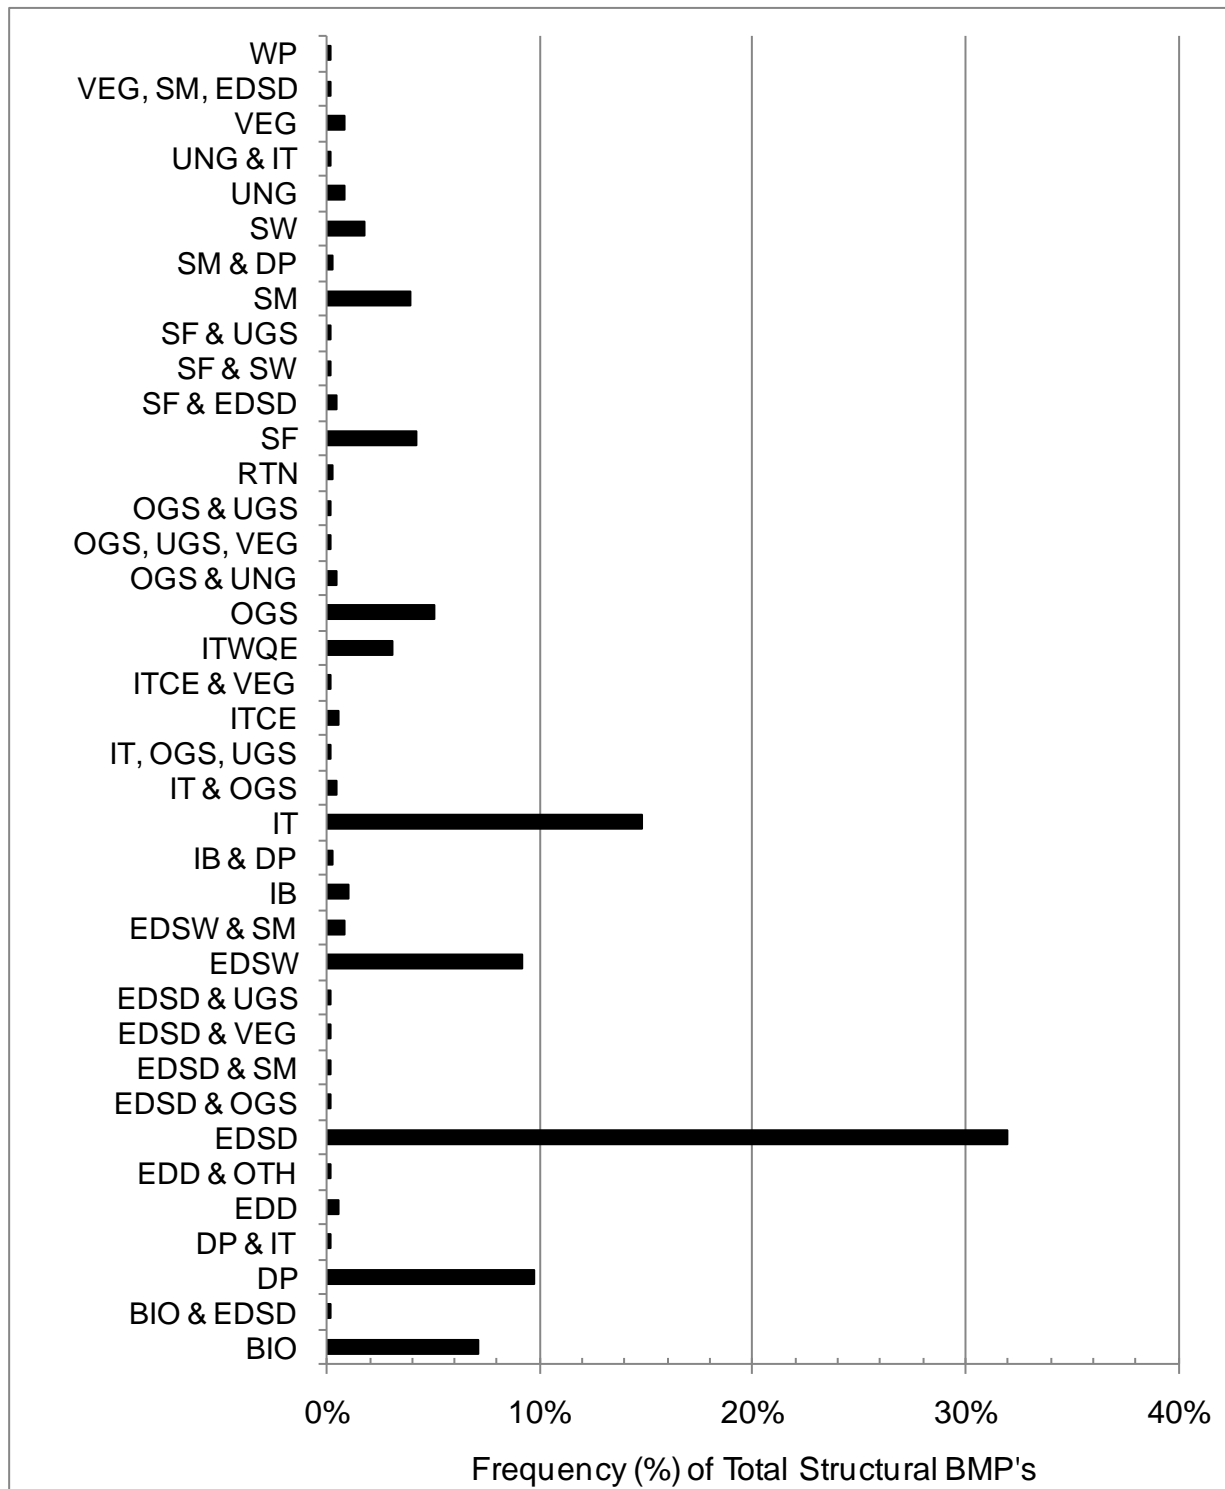


Figure 9-2. Percentage of structural BMP types in Frederick County.

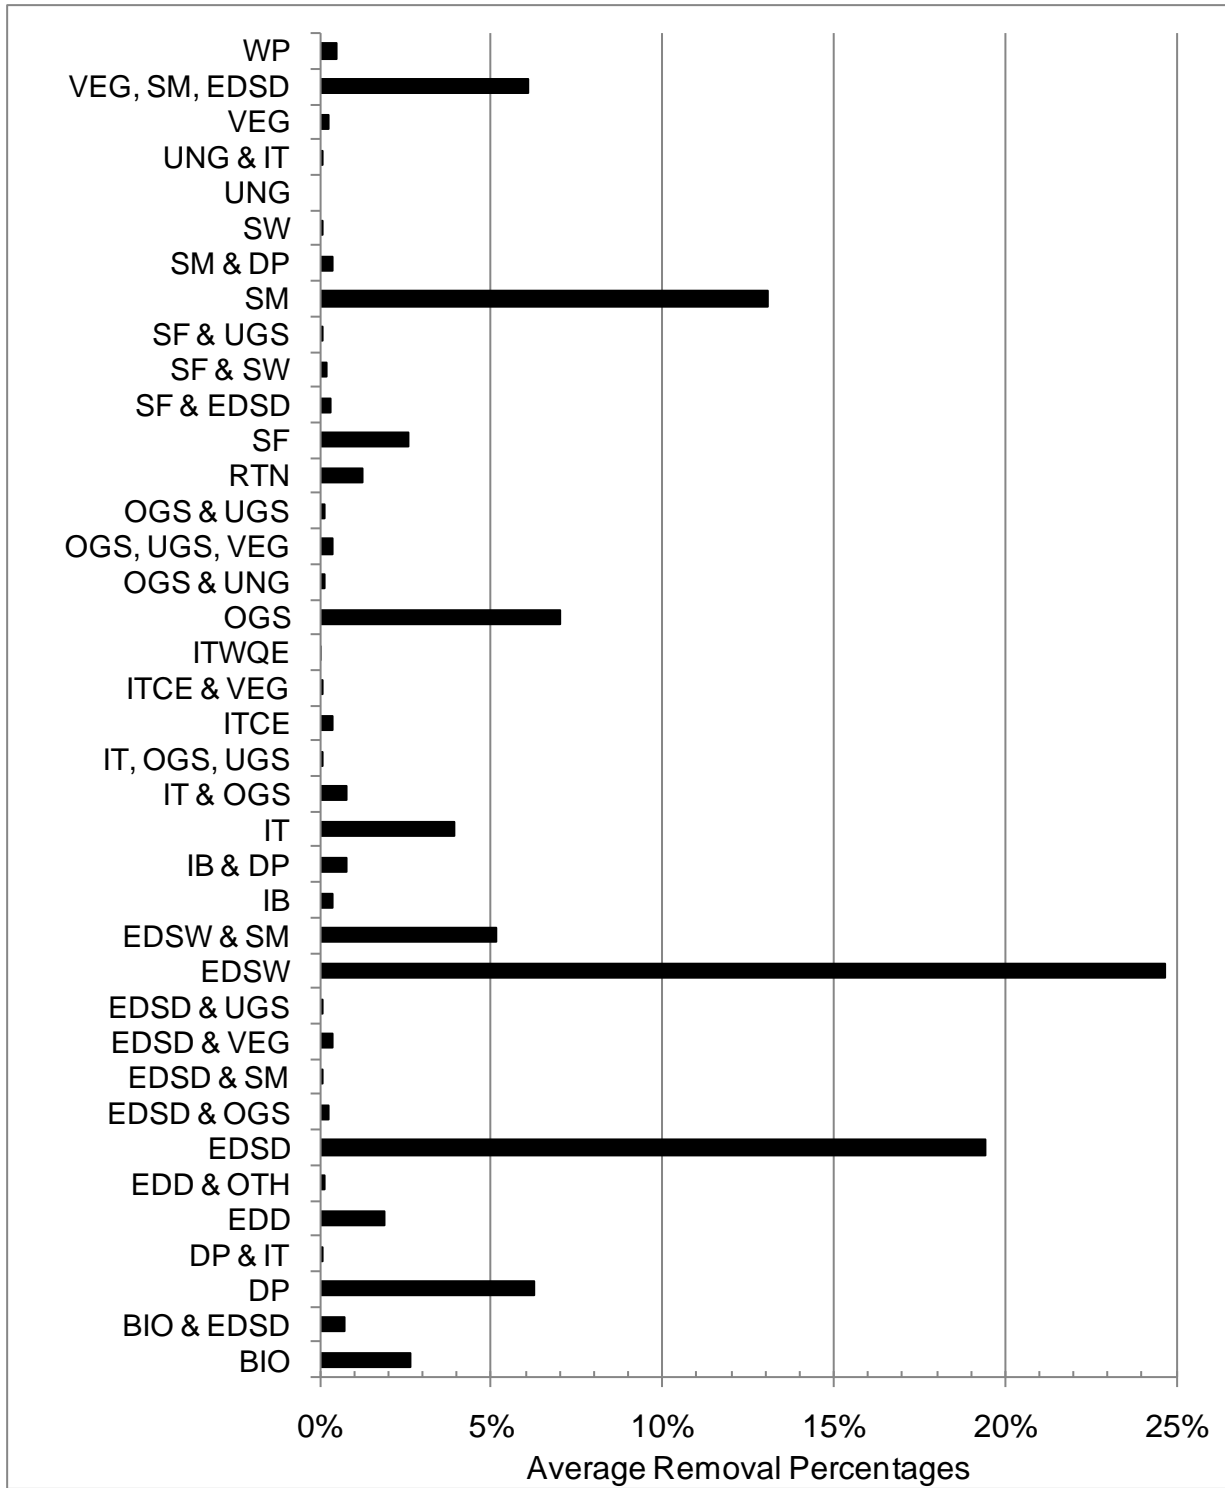


Figure 9-3. Average pollutant removal percentage by BMP type for all pollutants for Frederick County outfalls based on the Simple Method.

Extended Dry Detention Ponds were slightly lower in overall removal rates, averaging 19.4% of all pollutants considered (Figure 9-3). Extended Dry Detention Ponds were most efficient at removing BOD, COD, cadmium, total suspended solids, and total nitrogen (Figure 9-1, Appendix D-3). Overall, these results are a function of area covered by BMP and their removal efficiencies.

On a per acre basis, removal percentages are much more uniform (Appendix D-6). Combined Infiltration Basins with Dry Ponds removed the greatest percentage of BOD, COD, cadmium, copper, lead, and TP. Dry Pond and Infiltration Trench removed the greatest percentages of TSS and dissolved phosphorus. TKN, TN, and zinc had the greatest removal percentages from Infiltration Trench, Oil/Grit Separator, and Underground Device.

An overall summary of pollutant removals at outfalls in Frederick County, by associated management practices, is listed in Table 9-4. These results show that 48% of total suspended solids are removed by these facilities, with only 23% and 31% of total nitrogen and phosphorus being removed, respectively. These facilities also remove 16% of dissolved phosphorus and 22% of carbon (BOD and COD). Removal of metals ranged from 25% to 42%. One BMP structure in the database changed practice type category from Dry Pond in 2008 to Extended Wet Detention Pond in 2009. To make the results comparable across years, this BMP was reassigned in the 2008 and 2007 databases and recalculated.

Table 9-4. Summary of percent pollutant removal by stormwater BMPs					
	Total Loadings	Net Loadings	2009 Percent Removal	2008 Percent Removal*	2007 Percent Removal*
Total Evaluated Drainage Area, ac	13,931				
Managed Drainage Area, ac		10,935			
TSS (lbs.)	808,268	389,048	48.1%	47.8%	46.2%
Total Phos (lbs.)	6,908	2,141	31.0%	30.6%	29.2%
TN (lbs.)	95,653	21,571	22.6%	22.2%	21.4%
COD (lbs.)	725,369	162,503	22.4%	21.9%	20.7%
BOD (lbs.)	230,630	51,668	22.4%	21.9%	20.7%
Cadmium (lbs.)	21	7	34.4%	34.4%	33.3%
Copper (lbs.)	505	127	25.1%	24.8%	23.7%
Lead (lbs.)	244	102	41.6%	41.6%	40.4%
Zinc (lbs.)	3,422	1,145	33.5%	32.9%	31.1%
TKN (lbs)	54,735	123	0.2%	0.2%	0.2%
TDS	5,016,470	0	0%	0%	0%
Diss Phos (lbs.)	4,783	769	16.1%	16.0%	15.2%
* Using 2009 removal efficiency values					